




STANDARD PERFORMANCE CURVE (NPV-62160)
TESTED SEAL WATER @ 60 DEGREE FAHRENHEIT
BAROMETER: 30 INCHES HG
PERFORMANCE MEASURED AT SEA LEVEL
PERFORMANCE TOLERANCE: $\pm 5\%$
PNEUROP STANDARD COMPLIANT

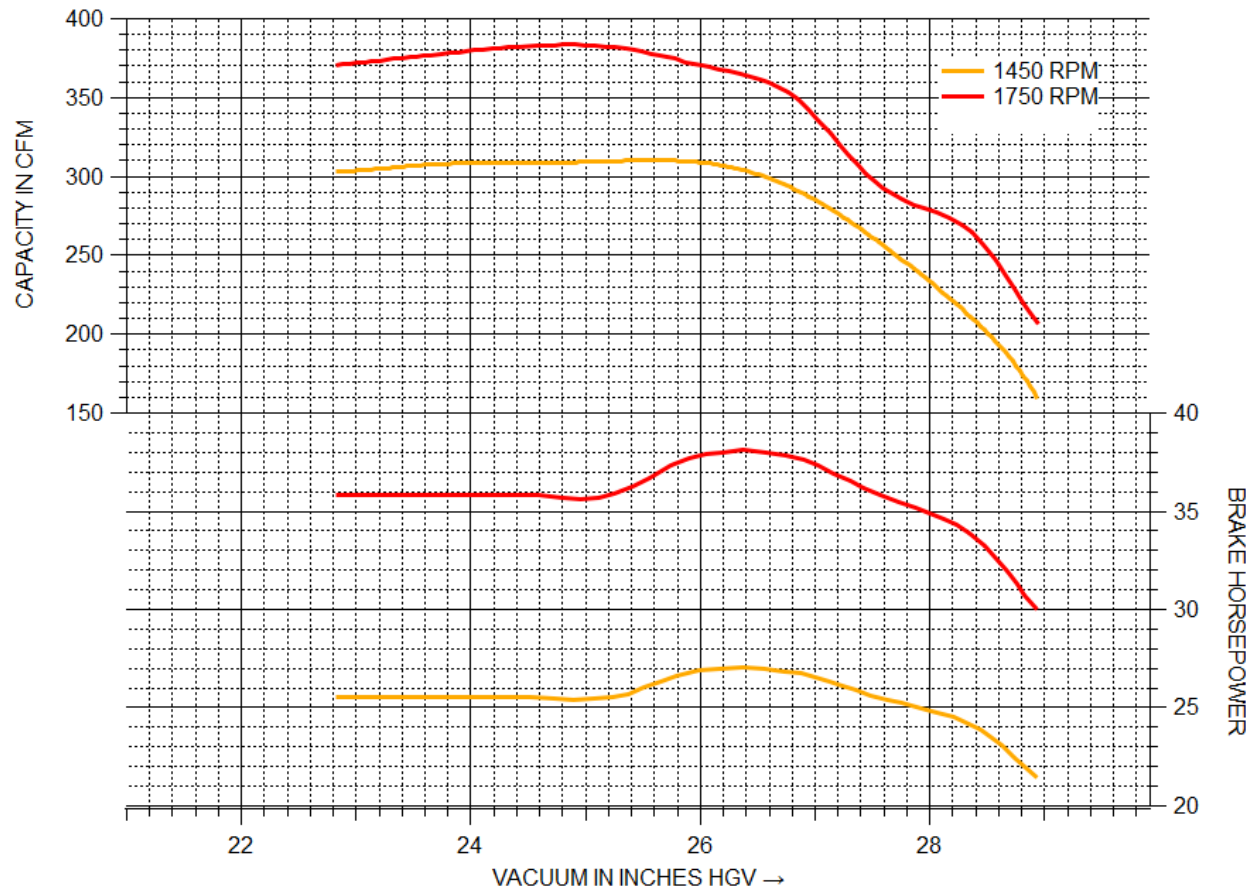

*The dry air curves above apply to cast iron, direct-driven equipment. Stainless steel equipment may experience $\pm 10\%$ performance due to stringent manufacturing specifications on dimensional tolerancing.

**NES NPV Series curves have been recorded solely at their optimal range of operation.