




STANDARD PERFORMANCE CURVE (NPV-82350)
 TESTED SEAL WATER @ 60 DEGREE FAHRENHEIT
 BAROMETER: 30 INCHES HG
 PERFORMANCE MEASURED AT SEA LEVEL
 PERFORMANCE TOLERANCE: ± 5%
 PNEUROP AND HEI STANDARD - COMPLIANT

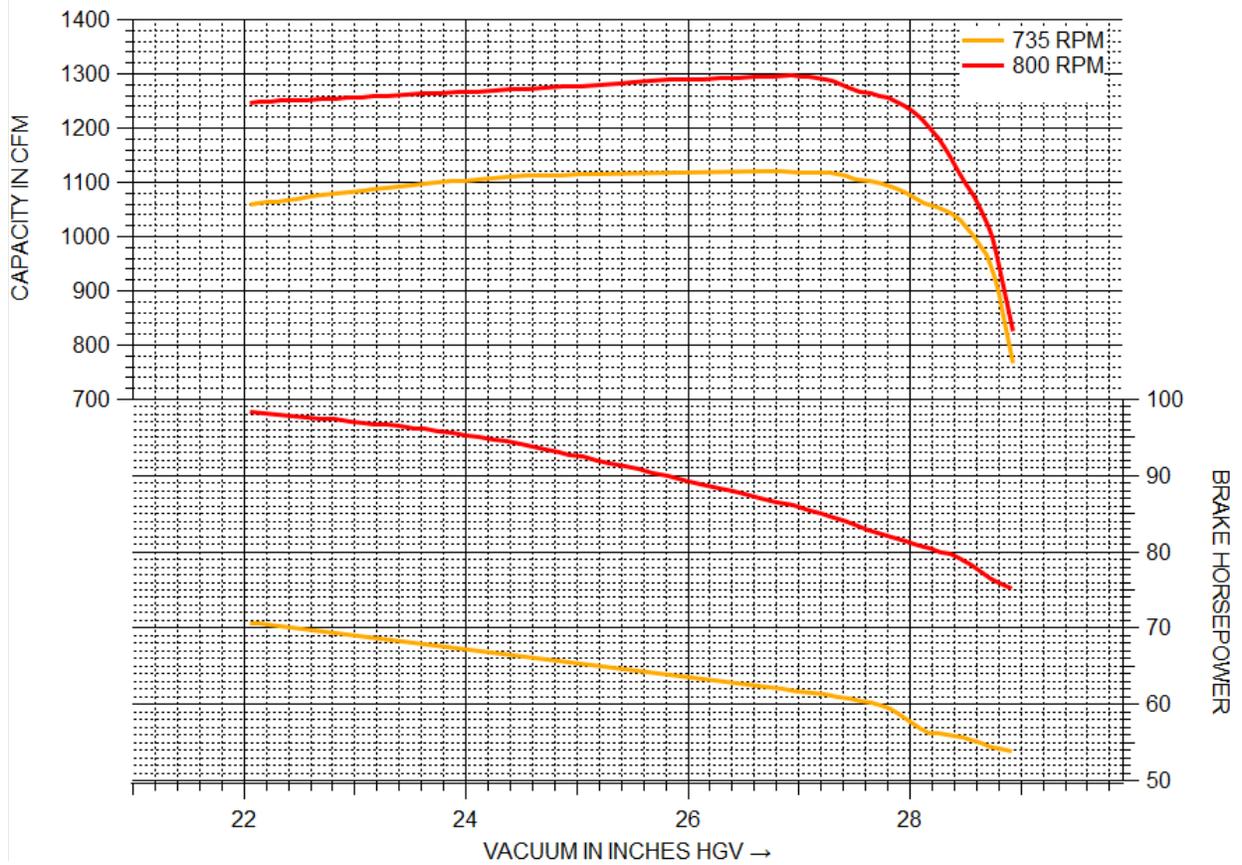

*The dry air curves above apply to cast iron, direct-driven equipment. Stainless steel equipment may experience ± 10% performance due to stringent manufacturing specifications.

**NES NPV Series curves have been recorded solely at their optimal range of operation.