


STANDARD PERFORMANCE CURVE (NPV-72200)
TESTED SEAL WATER @ 60 DEGREE FAHRENHEIT
BAROMETER: 30 INCHES HG
PERFORMANCE MEASURED AT SEA LEVEL
PERFORMANCE TOLERANCE: ± 5%
PNEUROP STANDARD COMPLIANT

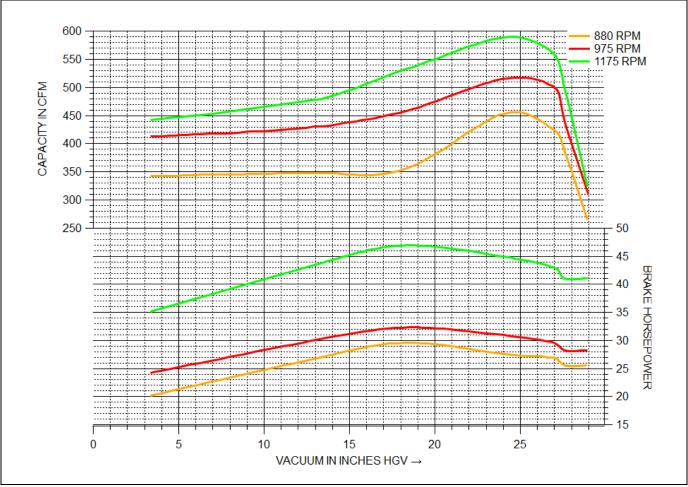

^{*}The dry air curves above apply to cast iron, direct-driven equipment. Stainless steel equipment may experience ± 10% performance due to stringent manufacturing specifications.

^{**}NES NPV Series curves have been recorded solely at their optimal range of operation.